




SBP 33
Assembly Instruction
2022 Model
(Plastic Connectors)

PART 1: FRAME ASSEMBLY.



Assembled Frame with Floor mats and Support straps

Included Frame Parts:

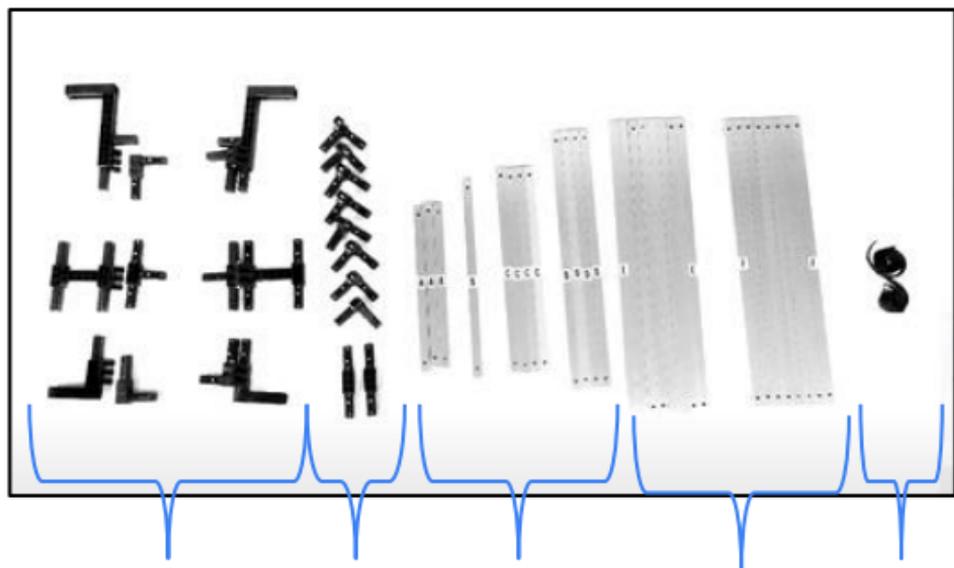

**Door
Frame
connec
tors**

**Booth
Frame
connec
tors**


**Door
Frame
bars:
A to D**

**Booth
Frame
bars:
E and F**

**Roof
Support
Strap**

Frame assembly Overview:


SPB33 FRAME ASSEMBLY DIAGRAM

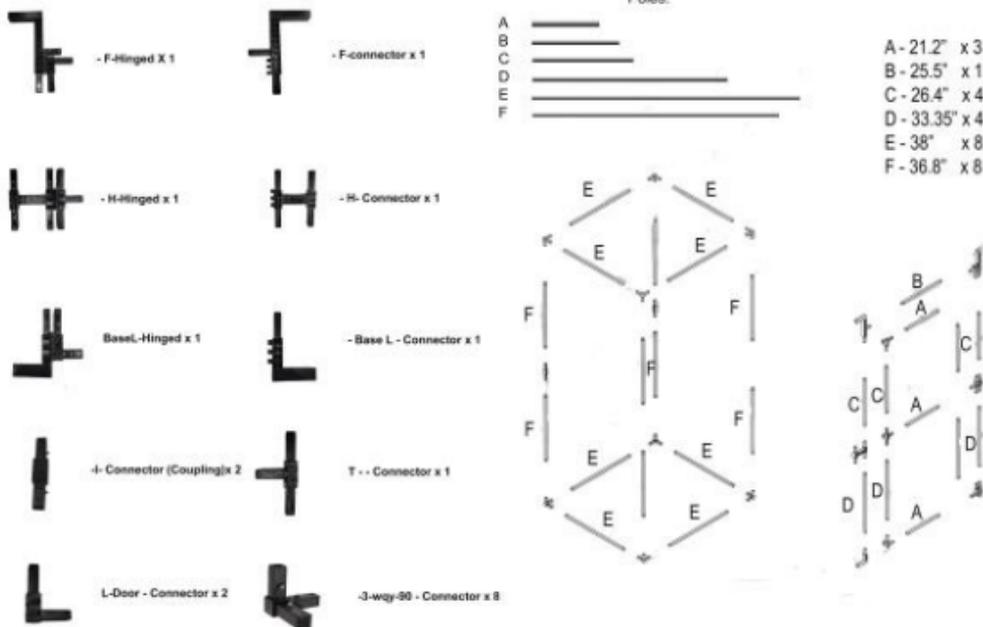


NOTE:

Lay out the Door frame parts on the floor. The 3-way connectors and the Top/Bottom Horizontal poles "E" and Vertical Poles "F" located on the Frame box Package.


Door Frame assembly

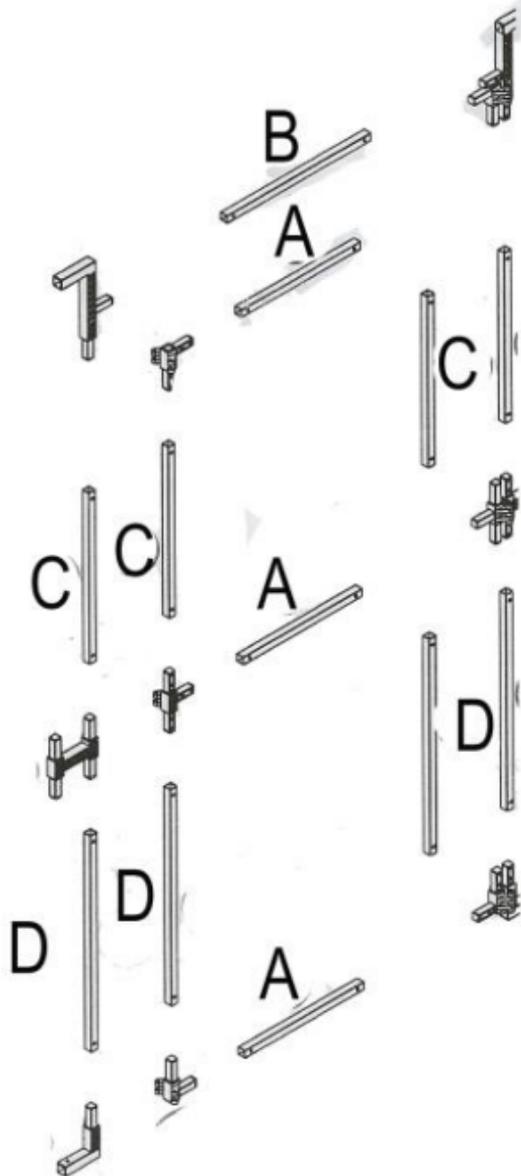

Door frame Connectors

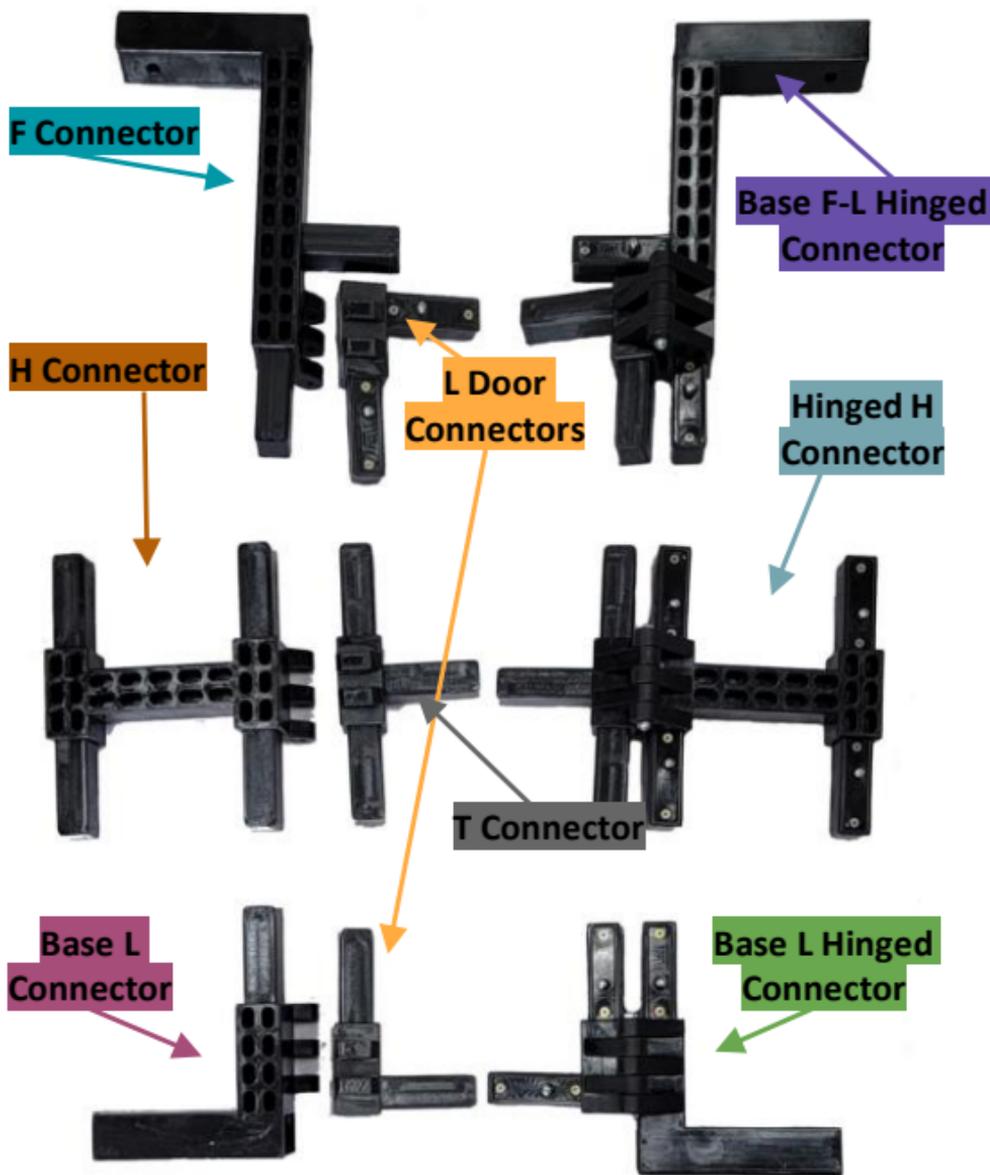


Lay out the Door Connectors

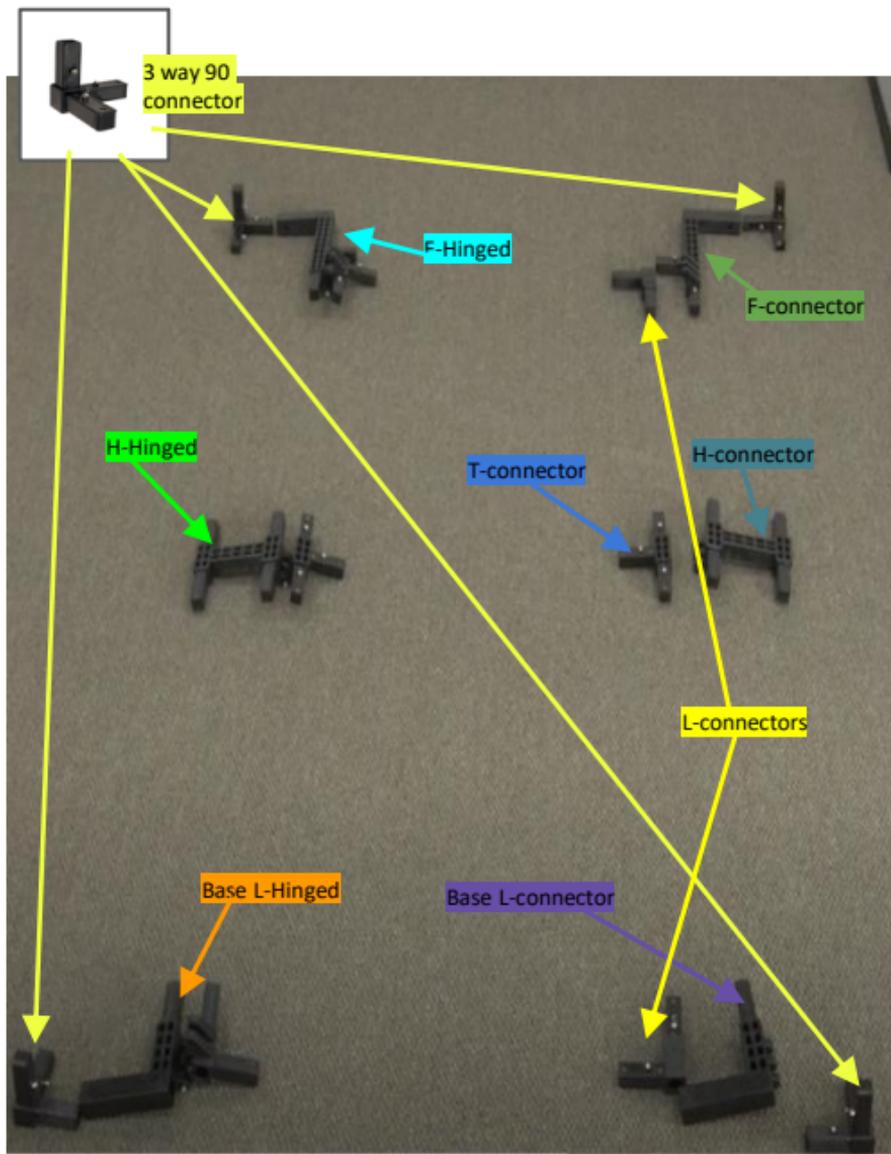


Lay out the Bars

1. Once the parts have been laid out, begin connecting the bars to and through the various connectors.

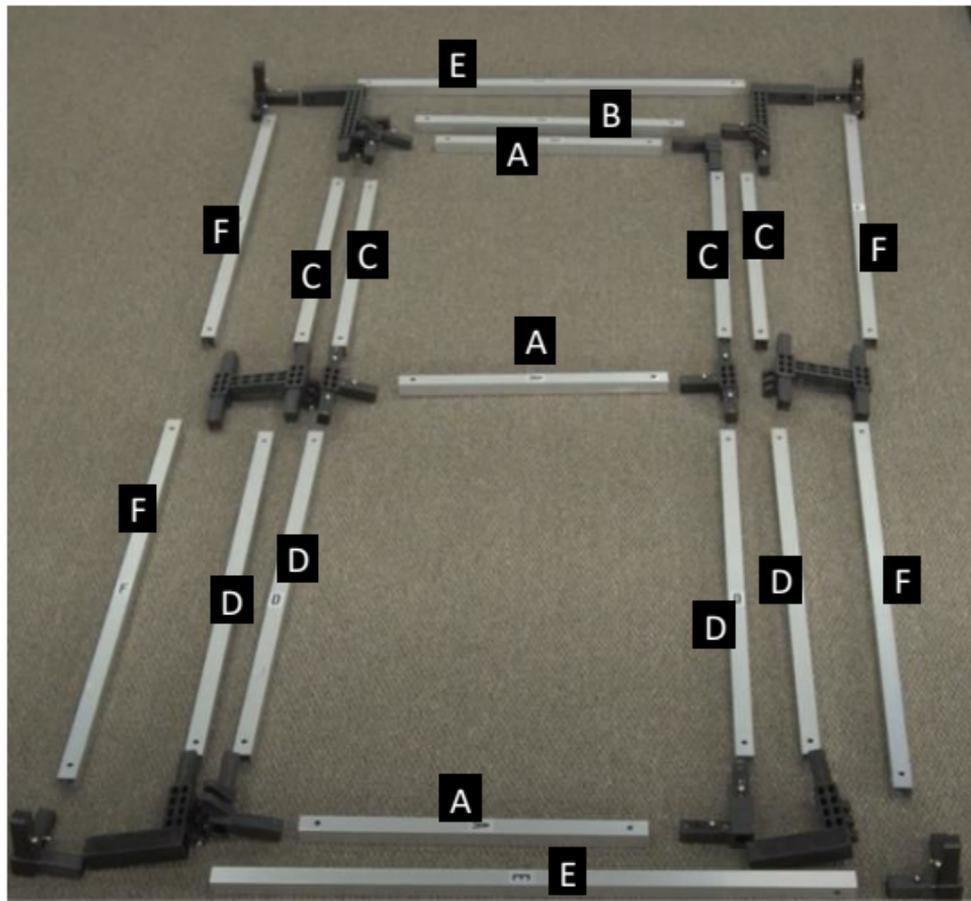



Attention: Make sure to install the L connector as shown with the longer end inserted in the vertical pole marked "D".

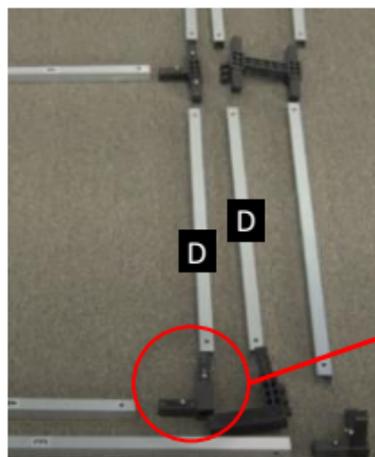


Connect all parts



NOTE: When connecting the middle section make sure to align all parts first and fit them in, then connect one by one trying to keep all parallel

Frame assembly Diagram

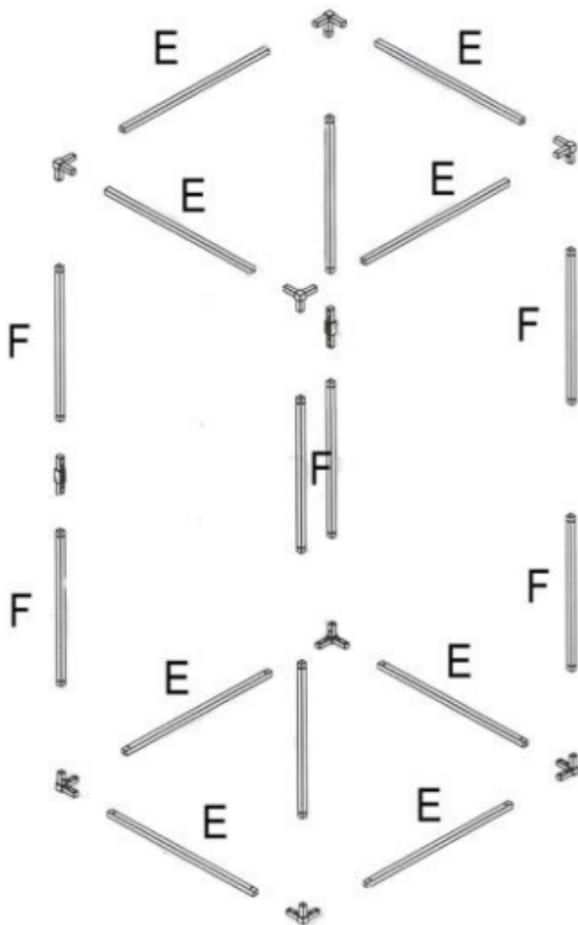

NOTE: "E" and "F" tubes may not be marked.
You can tell them by size: "E" is longer than "F" Tube:
E = 38 inches
F = 36.8 inches

Main Frame Connectors

Straight Connectors



3 Way 90° Connectors



NOTE: The main booth frame may be assembled without the door frame. This is why after assembly the frame WITH the door you may have two additional straight connectors left.

Continue assembling
the rest of the frame.



NOTE: if you do not have enough ceiling clearance,
then position the door frame vertically and continue
assembly of the rest of the frame in vertical position..

Attach Roof support straps



NOTE: The roof support straps have a loop on one end and the other end is fastened to the opposite side bar by D-ring attachment.

Attach the movable part of the door
frame



This completes Frame assembly

PART 2:

Panels installation.



NOTE: We recommend the following order:

1. Start with installing the blankets;
2. Wall panels
3. Door side panel
4. Roof panel.

Sometime when the space is tight and you have to install the booth in a corner – it make sense to install the back panel (close to the wall) first. Then blankets , side walls, etc.


Once the frame is assembled it will be difficult to move it, so ideally you want to set it up right where it supposed to be.

Hang the blankets on the frame.



NOTE: hang the blankets on the inside of the frame. Start from the middle of the door and follow around until you get back to the door. No need to stretch the blankets they should hang loose..

Hang the Wall panels on the frame.

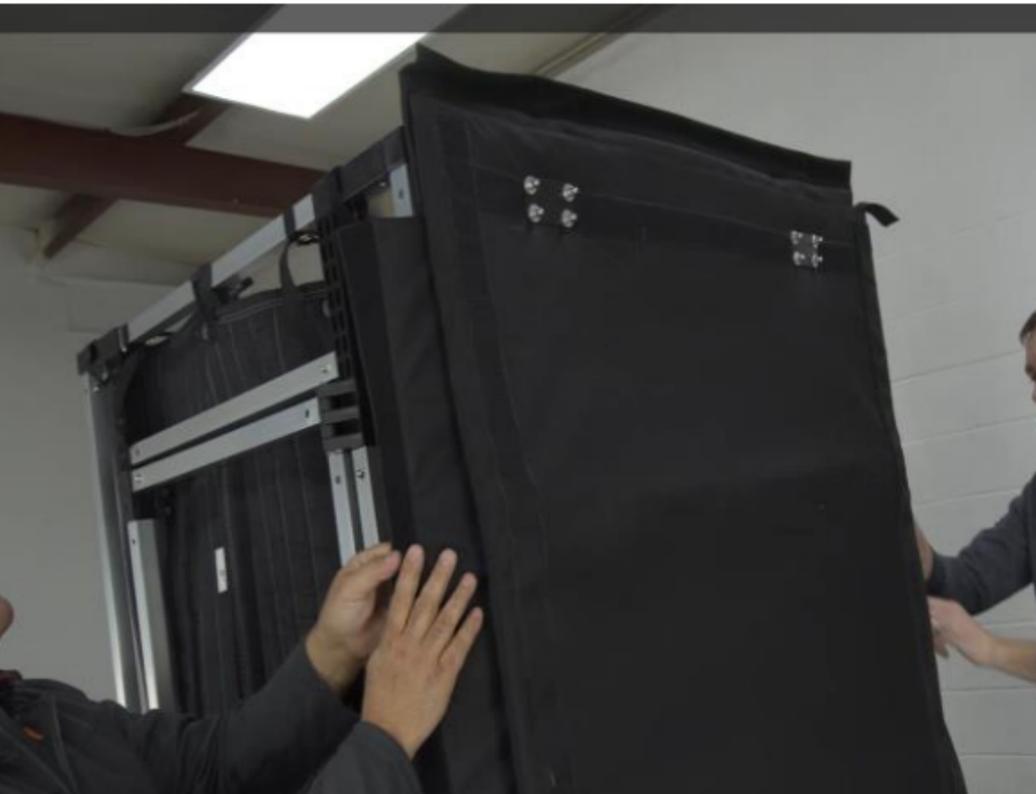

NOTE: have two people when installing the wall panels. They are quite heavy. Once the panels are on the frame you can slide them to adjust for exact position. Each panel has inside flap with sound blocker that needs to be wrapped around and hooked by Velcro to the adjacent panel. This flap seals the gap between the walls. The outside flap needs to be pulled tight and also attached to the adjacent panel.

Installing the door panel.



NOTE: start by hanging the Door panel same way as the wall panels. Then adjust the position to make sure that the door frame fit and the door can open. You would need to place the metal hook brackets of the door panel over the plastic F connectors of the door frame.

Then use the Velcro tie ups to attach the door panel to the door frame all around.

Installing the Roof panel.



NOTE: With two people after you place the roof panel on the frame – one person should help from the inside by pushing the panel upwards and disconnecting from Velcro and the other person would align the roof from the outside. Once the roof is squared on the top the person on the inside would unfold and attach the interior flap. To finish up seal the roof with the exterior flaps.

This complete the SPB33 assembly.



ACCESSORIES:

Light:

The light can be placed simply under the roof straps;

Ventilation Fan:

If you Purchased the fan with the Sleeve the fan itself should be positioned outside and the plastic portion of the sleeve can be inserted between the wall and door panels. Simply open the left side corner door/wall panel and insert the sleeve in it.

You can also add a longer tube in case you want to draw air from a window or an AC.